



700 WATT 115V OUTPUT BACKUP SYSTEMS.

| MODEL | BATTERY | SOCKETS | MODEL | BATTERY | SOCKETS |
|--------|-----------|---------------|--------|-----------|---------------|
| SM4430 | 96 Volts | 2 X IEC, 50Hz | SM4436 | 160Volts | 2 X IEC, 50Hz |
| SM4431 | 96 Volts | 2 X IEC, 60Hz | SM4437 | 160Volts | 2 X IEC, 60Hz |
| SM4432 | 110 Volts | 2 X IEC, 50Hz | SM4438 | 220 Volts | 2 X IEC, 50Hz |
| SM4433 | 110 Volts | 2 X IEC, 60Hz | SM4439 | 220 Volts | 2 X IEC, 60Hz |
| SM4434 | 125 Volts | 2 X IEC, 50Hz | SM4442 | 320 Volts | 2 X IEC, 50Hz |
| SM4435 | 125 Volts | 2 X IEC, 60Hz | SM4443 | 320 Volts | 2 X IEC, 60Hz |




- **AUTO CHANGE OVER WHEN POWER FAILS.**
- **RUNS MICROWAVES AND SMALL FRIDGES.**
- **HIGH OUTPUT POWER IN COMPACT SIZE.**

GENERAL DESCRIPTION: These static inverters convert battery power into a 115V AC RMS 50Hz or 60Hz supply suitable for operating domestic appliances, small power tools, etc. They are particularly suitable for small refrigerators and microwave ovens because of their high surge capability. They can be permanently connected to 115V AC mains and will automatically change over to battery operation when the mains fails. The nominal continuous power rating into a resistive load is 700 watts, with intermittent operation at 800 watts.

When the mains input socket is connected to functioning mains, it supplies the connected appliance. The battery function may be switched off by the switch on the front face, disabling automatic change-over. The ac input may be directly switched to the output, by-passing the unit.

BATTERY SELECTION: Only heavy-duty (high discharge rate) batteries are suitable as a power source. Fully sealed types should be used in enclosed spaces (especially inside the home).

FIGURE 1 CONCEPT AND CONNECTION DIAGRAM.

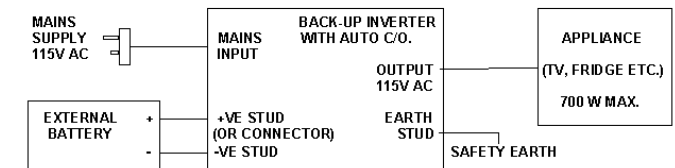

SPECIFICATION:

INPUT

Battery: 96, 110, 125, 160, 220, 320V nominal.
Voltage Range: Nominal, -13.2%, +15%.
Power, No Load: 12W
Efficiency: 85% typical.
AC Input Voltage: 115V AC.

OUTPUT

Output Voltage: 115V ± 10% from inverter (or straight through mains).
Frequency: Nominal, -2Hz to +3Hz.
Output Wave Form: Quasi sine wave.
Power, Nominal: 700 Watts continuous (resistive).
Power, Short term: 800 Watts for 5 minutes.
Protection: Current and temperature limit.

GENERAL

Size: 170mm x 270mm x 180mm.
Weight: 7.4 Kg.
Storage Temperature: -40 to +70C.
Operating Temperature: -40 to +35C.
Manufacturer: Made in the United Kingdom.

CAUTION: This adaptor is supplied on the basis of the user determining the suitability for the purpose for which it is to be used. Do not use in a moving vehicle without the consent of the vehicle manufacturer. Do not use for aviation or marine applications without our written agreement. Do not use for life dependent applications. We reserve the right to change the specification without notice.

We reserve the right to change the specification without notice.

Document 4430-993